


With hall sensor		BD3260S-...	1204	2404
Motor data				
Values at nominal voltage				
1	Nominal voltage	V	12	24
2	No load speed	rpm	3650	3597
3	No load current	mA	190	100
4	Nominal speed	rpm	2914	3001
5	Nominal torque	mNm	45	45
6	Nominal current	A	1.66	0.82
7	Stall torque	mNm	223.24	271.47
8	Stall current	A	7.49	4.46
9	Max. efficiency	%	70.7	72.3
10	Supply voltage +Vcc	V	10..28	10..28
11	Direction of rotation		CW	CW
12	Torque constant	mNm/A	30.60	62.29
13	Speed constant	rpm/V	312	153
14	Speed/torque gradient	rpm/mNm	16	13
15	Mechanical time constant	ms	3.2	2.6
16	Rotor inertia	gcm ²	18.6	18.6

17	Thermal resistance housing-ambient	6.0 K/W
18	Thermal resistance winding-housing	1.9 K/W
19	Thermal time constant winding	19 s
20	Thermal time constant motor	435 s
21	Ambient temperature	-30...+100°C
22	Max. permissible winding temperature	+150°C
23	Max. permissible speed	8000 rpm
24	Axial play at axial load	<8 N 0 mm >8 N max. 0.3 mm
25	Radial play	preloaded
26	Max. axial load (dynamic)	7.5 N
27	Max. force for press fits (static, shaft supported)	100 N 2700 N
28	Max. radial loading, 5mm from flange	25 N
29	Number of pole pairs	7
30	Number of phases	3
31	Weight of motor	150 g

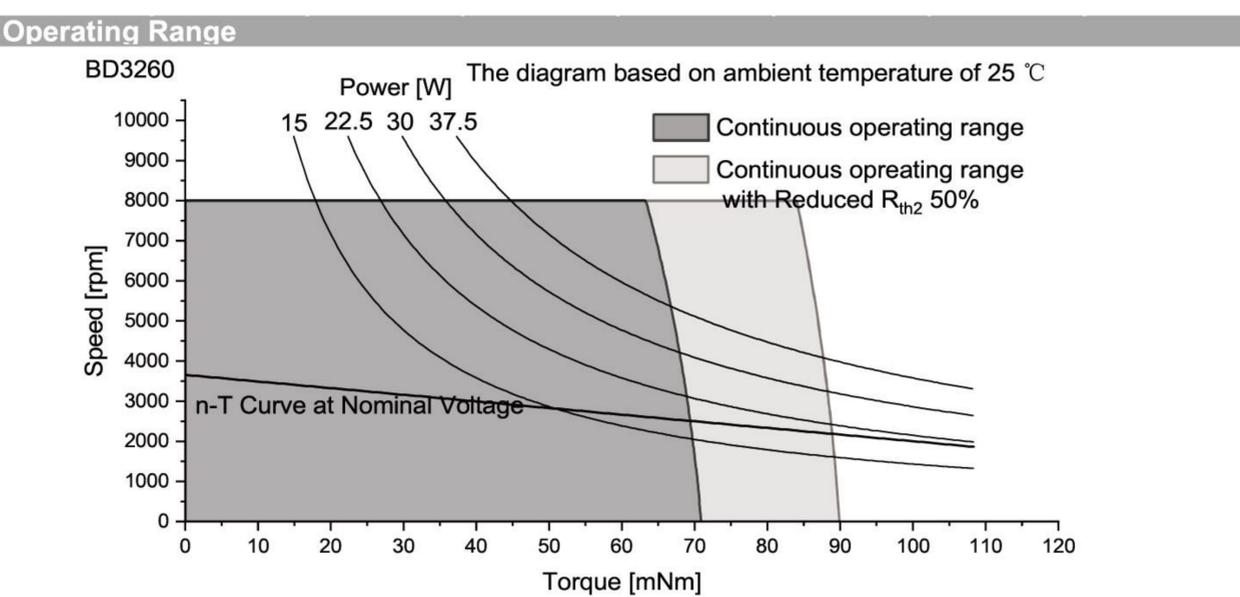

Controller features	
Sensor, Open loop, I _{max} < 2.2A	
Overload protection, Stall protection	
Max. temperature of electronics	+105°C

Connection			
Conection		PVC	
Pin 1 +VCC		AWG22	red
Pin 2 GND		AWG22	black

Caution:
Incorrect lead connection will damage the controller!

Configuration	
Function:	On&Off/Direction/Speed control/Brake Speed closed&open-loop Control/Speed feedback
Performance:	Customized in the continuous operating range
Ball bearing:	Preload
Flange:	Standard frange front&back/customize the frange
Shaft:	Length/Diameter/Cut face
Leadwire:	PVC/Silicon/Teflon/UL No/Dimension/length
Connector:	JST/MOLEX/TE

More:
Please contact our sales engineers